

## Matte Finish Heavy Duty Commercial Flooring

With millions of feet sold, many happy customers, and over 25 years experience, Protect-All continues to provide high quality safety flooring that is still single-sourced and manufactured in America.

### Description

Recycled PVC flooring for heavy traffic and wet areas, with a microtextured slip-resistant finish.

- **Excellent Traction:** wet or dry
- Resistant to common fats, acids, and greases
- Resistant to stains, odors, and fluids
- **Shock absorbing** and impact-resistant
- Chemically welded seams for a **watertight**, monolithic installation\*
- **No wear layers** or coatings to maintain and repair
- Excellent for **low temperature** applications
- **No grout lines** to maintain and repair


### Characteristics

- Thickness: .25"
- Composition: Recycled PVC with fabric-strand reinforcement
- Colors: 11
- System Layouts: 4
- Surface Texture: Microtextured
- Surface Finish: Matte
- Base: Intergral Cove

### Testing Data

	TEST METHOD	UNITS	.25 IN
Weight	ASTM D-751	oz/sf	25.16
Dynamic Coefficient of Friction	ANSI A326.3		.43
Coefficient of Friction	ASTM D-695	Dry	.88
<b>Fire Test NFPA Type 1 Rated</b>			
Critical Radiant Flux	ASTM D-648	w/cm <sup>2</sup>	1.05
Burn Distance		cm	12
Breaking Strength	ASTM D-2047	lbs	405 x 723
Compressive Strength	ASTM D-751	psi	641
Elongation	ASTM D-751	%	76.5 x 88.5
Shore A Hardness			80 - 85
Tear Strength	ASTM D-751	lbs	76.5 x 84
Bacteria and Mildew Resistance	ASTM G-21		Pass

### Colors

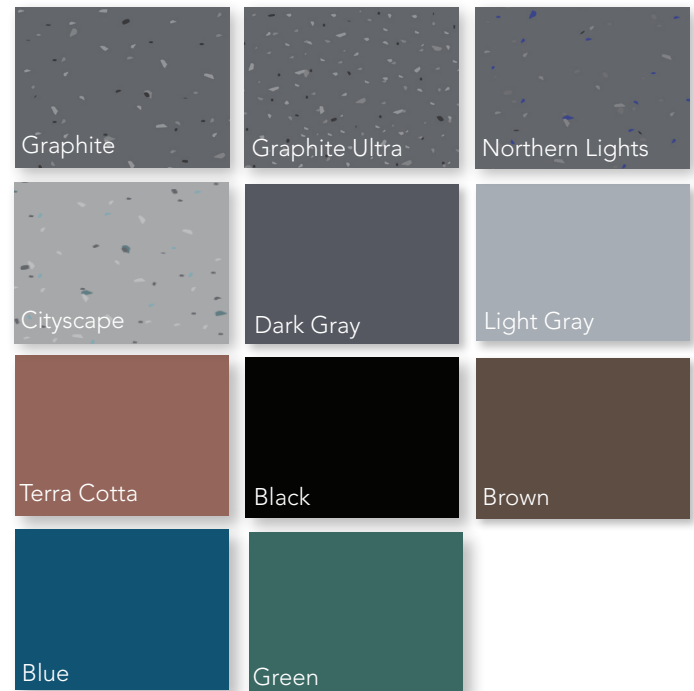

### Sizes

5' x 8' Sheets    5' x 30' Roll    5' x 5' Tile    2' x 2' Tile



\*Watertight flooring can only be achieved when Protect-All is installed properly and is chemically welded.